


EDGE LIGHTING

CHEVRON


The Chevron is a performance feature pendant, as the wayfinding sibling of our Linteq range. Available in various finishes, wraps and sizes, customisation is key to unlocking its potential.

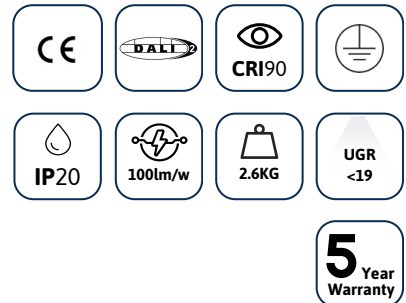

TECHNICAL INFORMATION

Installation	Surface Mounted (SM) or Suspended (SS)
Body Colour	Grey (G), White (W) or Black (B)
Dimensions	50mm x 75mm x desired leg length (mm)
Lumen Output (per metre)	1500lm (15W), 2000lm (20W), 3000lm (30W) or 4500lm (45W)
Colour Temperature	2700K, 3000K, 4000K, Tuneable White or RGBW
Colour Rendering Index	CRI90
Optical Distribution	Direct: Opal Diffuser (OP) or Microprism Diffuser (MP) Direct/Indirect: Opal Diffuser (IDOP) or Microprism Diffuser (IDMP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

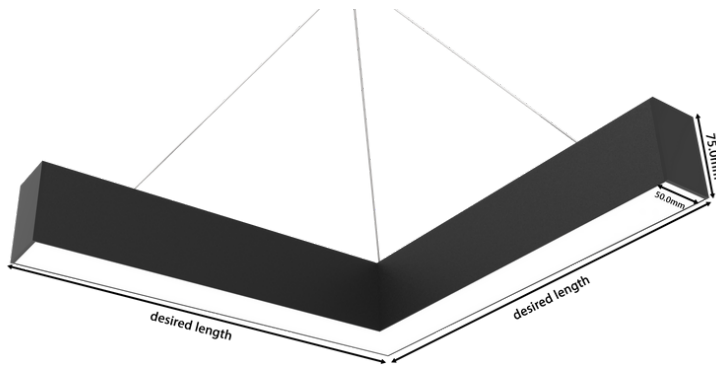

PRODUCT SHOWCASE



PRODUCT CODE

CHEV/SS/B/900/2000LM/4000K/90/OP/20/DD

Chevron, suspended, black finish, 900mm, 2000 lumens per metre, 4000K, CRI90, direct: opal diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK