




CIRQA HYDRO


Hydro is IP65 and IK08 as standard for exposed areas and small spaces. Available with occupancy & daylight sensing for energy saving replacements for fluorescent and fixed output legacy versions.

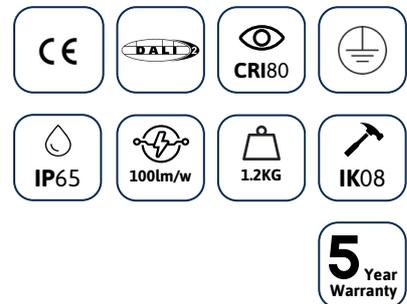


TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	White (W)
Dimensions	Ø316mm x 83mm
Lumen Output	1400lm (14W)
Colour Temperature	3000K-4000K-6000K Switchable (CCT346)
Colour Rendering Index	CRI80
Optical Distribution	Opal Diffuser (OP)
Ingress Protection	IP65
Controls	Fixed Output (FO), DALI (DD) or Corridor Function (CF)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

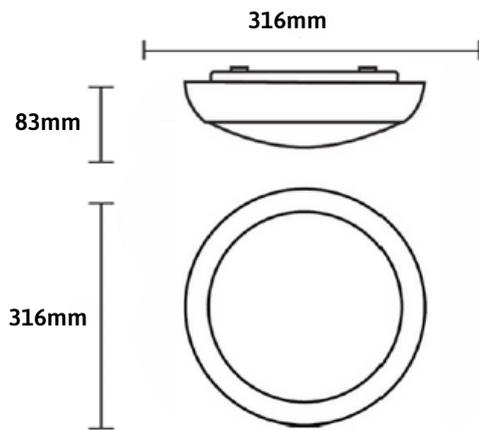

PRODUCT SHOWCASE

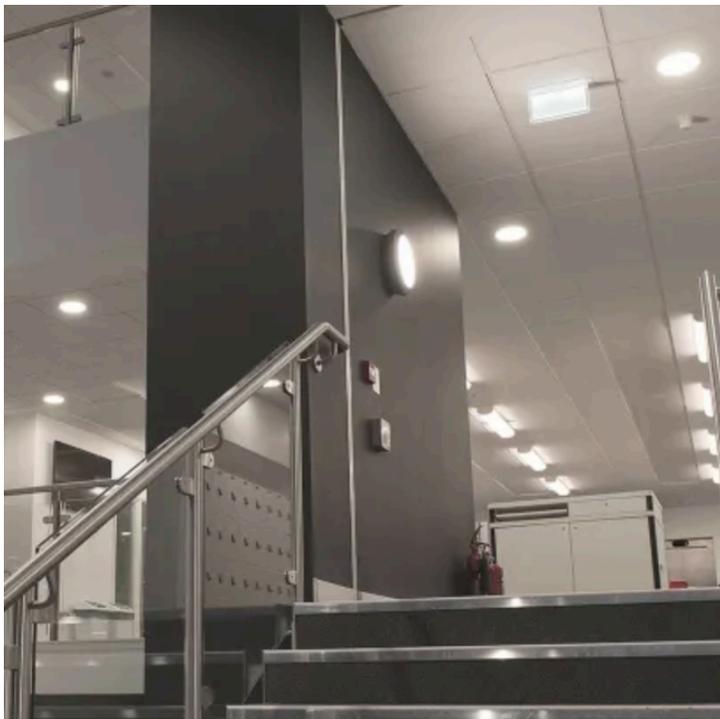

PRODUCT CODE

CQAHYD/SM/W/1400LM/CCT346/80/OP/65/DD/EM3

Cirqa Hydro, surface mounted, white finish, 1400 lumens, 3000K-4000K-6000K Switchable, CRI80, opal diffuser, IP65 rated, DALI Dimming, 3 hour emergency

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK