




EDGE
LIGHTING

ECLIPSE P400


Slim in profile with minimal trim, our Eclipse maximises lit surface area for a comfortable, low glare environment. P400 is rod suspended for modern workspaces with the user in mind.

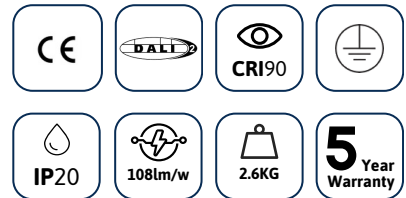

TECHNICAL INFORMATION

Installation	Suspended (SS)
Body Colour	Black (B)
Dimensions	Ø400mm diameter x 86mm
Lumen Output	3500lm (33W) or 4300lm (40W)
Colour Temperature	3000K, 4000K, or 5700K
Colour Rendering Index	CRI90
Optical Distribution	Direct: Opal Diffuser (OP) or Microprism Diffuser (MP) Direct/Indirect: Opal Diffuser (IDOP) or Microprism Diffuser (IDMP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

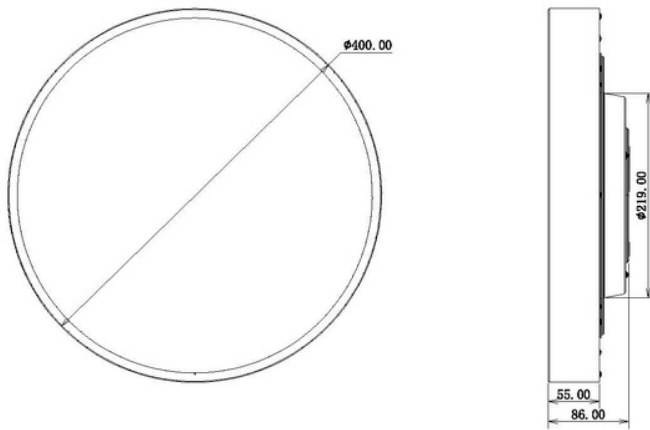

PRODUCT SHOWCASE



PRODUCT CODE

ECPP4/SS/B/4300LM/4000K/90/OP/20/DD

Eclipse P400, suspended, black finish, 4300 lumens, 4000K, CRI90, direct: opal diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

020 8687 0190

sales@edgelighting.co.uk



EDGE
LIGHTING

EDGE.LIGHTING.CO.UK