


EDUTEQ 1200


For solid ceiling or low height installations, the Eduteq provides uniform lighting below and an ambient glow onto the ceiling to reduce glare, ideal for the education sector and 4ft retrofit solutions.

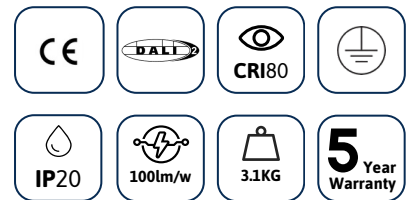

TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	White (W)
Dimensions	1190mm x 210mm x 68mm
Lumen Output	2500lm (25W) or 5000lm (50W)
Colour Temperature	3000K or 4000K
Colour Rendering Index	CRI80
Optical Distribution	Microprism Diffuser (MP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), PIR Sensor (PIR), Q-Sense (QS) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

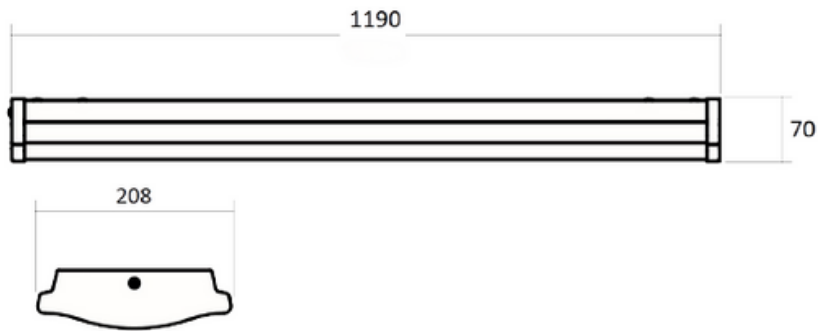

PRODUCT SHOWCASE



PRODUCT CODE

EDU1200/SM/W/5000LM/4000K/80/MP/20/DD

Eduteq 1200mm, surface mounted, white finish, 5000 lumens, 4000K, CRI80, microprism diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

020 8687 0190

sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK