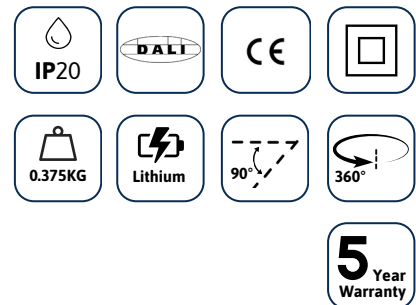




**EDGE**  
LIGHTING

## EMTEQ PRO2

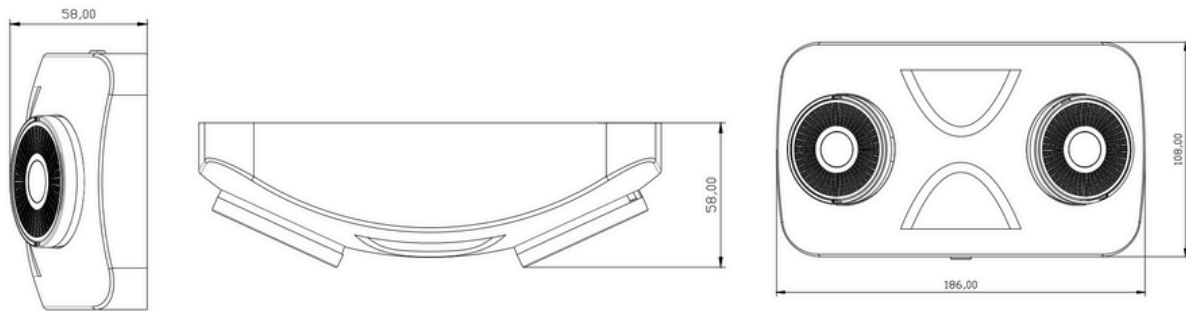
A modern take on legacy Frogeye emergencies, the Pro2 boasts two tiltable spotlight beams, typically used in high exposed ceiling applications. Self-test as standard with long lasting lithium batteries for peace of mind.







### TECHNICAL INFORMATION

|                             |  |
|-----------------------------|--|
| <b>Installation</b>         | Surface Mounted (SM)                   |
| <b>Body Colour</b>          | White (W) or Black (B)                 |
| <b>Dimensions</b>           | 186mm x 108mm x 58mm                   |
| <b>Lumen Output</b>         | 400lm (4W)                             |
| <b>Discharge Duration</b>   | 3 Hours                                |
| <b>Test Mode</b>            | Auto Test (AT) or DALI Emergency (EMD) |
| <b>Optical Distribution</b> | Corridor (CO) or Open Area (OA)        |
| <b>Ingress Protection</b>   | IP20                                   |
| <b>Battery Type</b>         | LiFePO4 6.4V 1500mAh                   |
| <b>Legends Supplied</b>     | -                                      |
| <b>Accessories</b>          | -                                      |

## DIMENSIONS



## SPACING TABLE GUIDE (ROUND LENS)

| Height (m) |  |  |  |  |
|------------|---|---|--|---|
| 2          | 3   | 7.5   | 3.8  | 8.9   |
| 2.5        | 3   | 7.5   | 4.2  | 10  |
| 3          | 3.2   | 8.1   | 4.6  | 10.6  |
| 3.5        | 3.5   | 8.4   | 5  | 11.1  |
| 4          | 3.8   | 8.8   | 5.4  | 12.1  |
| 4.5        | 3.9   | 9   | 5.4  | 12.8  |
| 5          | 4   | 9.2   | 5.6  | 13.2  |

## PRODUCT CODE

**EMPRO2/SM/W/400LM/AT/OA/20**

Emteq Pro2, surface mounted, white finish, 400 lumens, automatic test, open area, IP20 rated

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

020 8687 0190

sales@edgelighting.co.uk



**EDGE**  
LIGHTING

EDGELIGHTING.CO.UK