



EDGE
LIGHTING

EYELID


Eyelid is a half-shielded wall mounted luminaire, suitable for unprotected areas where light spill is to be considered, whilst providing ample ambient lighting for safe passage. Securely fastened with impact resistance for public spaces.




TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	Black (B)
Dimensions	Ø350mm x 107mm
Lumen Output	1600lm (24W)
Colour Temperature	3000K-4000K-5000K Switchable (CCT345)
Colour Rendering Index	CRI80
Optical Distribution	Opal Diffuser (OP)
Ingress Protection	IP65
Controls	Fixed Output (FO), DALI (DD) or Microwave (MW)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

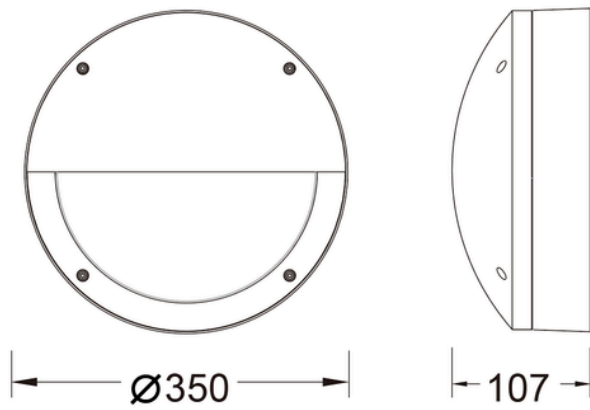

PRODUCT SHOWCASE

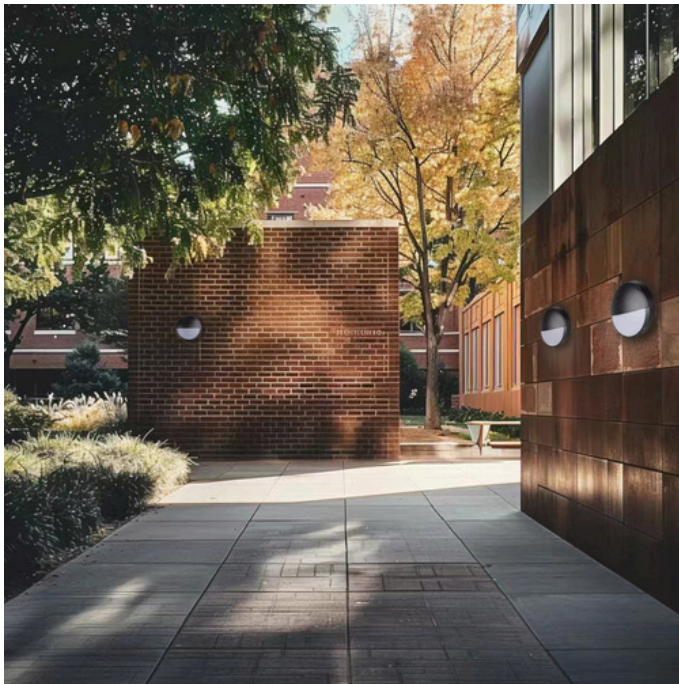

PRODUCT CODE

EYE/SM/B/1600LM/CCT345/80/OP/65/DD

Eyelid, surface mounted, black finish , 1600 lumens, 3000K-4000K-5000K Switchable, CRI80, opal diffuser, IP65 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK