




EDGE LIGHTING

GIMTEQ MONO



Our Gimteq range features a bi-axial square frame design that allows for unobstructed 360 degree tilting of up to 30 degrees angle, ensuring the targeted merchandise or graphic is always in focus.

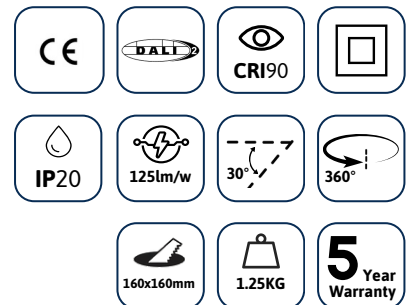

TECHNICAL INFORMATION

Installation	Recessed (R)
Body Colour	White (W) or Black (B)
Dimensions	175mm x 175mm x 110mm
Lumen Output	1500lm (13W), 2000lm (17W), 3000lm (25W) or 4500lm (37W)
Colour Temperature	3000K or 4000K
Colour Rendering Index	CRI90
Optical Distribution	Medium Beam (MB)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS)
Emergency	-
Accessories	-

DIMENSIONS

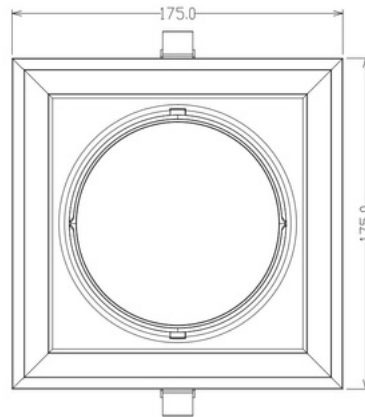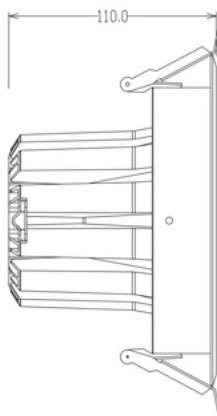

Cut-out



160mm x 160mm

PRODUCT SHOWCASE



PRODUCT CODE

GTM/R/W/2000LM/4000K/90/MB/20/DD

Gimteq Mono, recessed, white finish, 2000 lumens, 4000K, CRI90, medium beam, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK