




# EDGE LIGHTING

## HITEQ HILINE


HiLine is optically diverse for racked or open area environments with a range of sensors available. Die-cast for industry grade protection to IP65 and IK10, engineered for reliability providing fit and forget installation.

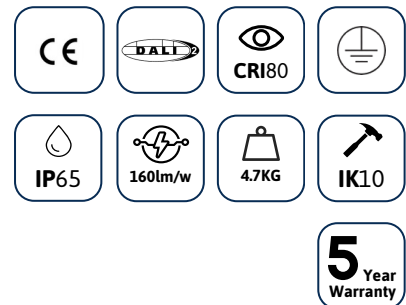

### TECHNICAL INFORMATION

<b>Installation</b>	Suspended (SS) or Surface Mounted (SM)
<b>Body Colour</b>	Black (B)
<b>Dimensions</b>	718mm x 137mm x 102mm
<b>Lumen Output</b>	24000lm (150W)
<b>Colour Temperature</b>	3000K, 4000K or 5000K
<b>Colour Rendering Index</b>	CRI80
<b>Optical Distribution</b>	Asymmetric Wide (AW)
<b>Ingress Protection</b>	IP65
<b>Controls</b>	Fixed Output (FO), DALI (DD), Microwave (MW) or Photocell (PC)
<b>Emergency</b>	3 Hour Emergency (EM3) or DALI Emergency (EMD)
<b>Accessories</b>	-

## DIMENSIONS

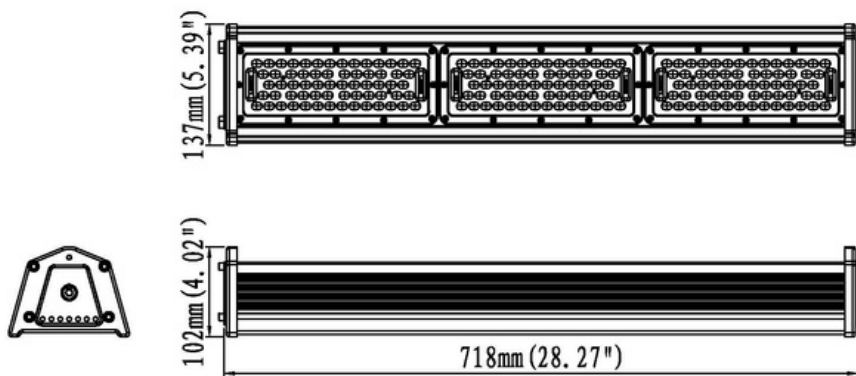

## PRODUCT SHOWCASE



## PRODUCT CODE

**HILINE/SS/B/24000LM/4000K/80/AW/65/DD**

Hiteq Hiline, suspended, black finish, 24000 lumens, 4000K, CRI80, Asymmetric Wide, IP65 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ [sales@edgelighting.co.uk](mailto:sales@edgelighting.co.uk)



**EDGE**  
LIGHTING

[EDGELIGHTING.CO.UK](http://EDGELIGHTING.CO.UK)