



LINPAQ 1500


Designed for rapid installation as 5ft LED replacement of T5 and T8 fluorescent battens, our Linpaq is available with integrated sensors for ultimate fit and forget solution.



TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	White (W)
Dimensions	1523mm x 64mm x 61mm
Lumen Output	3000lm (24W), 4000lm (32W) or 6000lm (50W)
Colour Temperature	3000K or 4000K
Colour Rendering Index	CRI80
Optical Distribution	Opal Diffuser (OP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), PIR Sensor (PIR) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

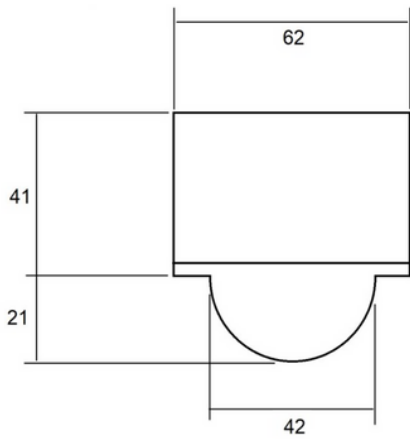

PRODUCT SHOWCASE



PRODUCT CODE

PAQ1500/SM/W/3000LM/4000K/80/OP/20/PIR

Linpaq 1500mm, surface mounted, white finish, 3000 lumens, 4000K, CRI80, opal diffuser, IP20 rated, PIR Sensor

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

020 8687 0190

sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK