


EDGE LIGHTING

LINTEQ 100


Wide profile design provides a softer lighting effect than it's vibrant Linteq 50 cousin. Screwless endcaps forms its timeless design, sitting comfortably in offices. Fully customisable with various finishes, optics and acoustic wrapping.

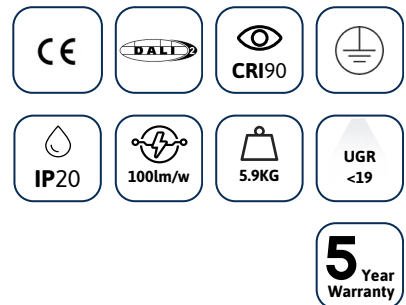

TECHNICAL INFORMATION

Installation	Surface Mounted (SM) or Suspended (SS)
Body Colour	Grey (G), White (W) or Black (B)
Dimensions	100mm x 120mm x desired length (mm)
Lumen Output (per metre)	1500lm (15W), 2000lm (20W), 3000lm (30W) or 4500lm (45W)
Colour Temperature	2700K, 3000K, 4000K, Tuneable White or RGBW
Colour Rendering Index	CRI90
Optical Distribution	Direct: Opal Diffuser (OP) or Microprism Diffuser (MP) Direct/Indirect: Opal Diffuser (IDOP) or Microprism Diffuser (IDMP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

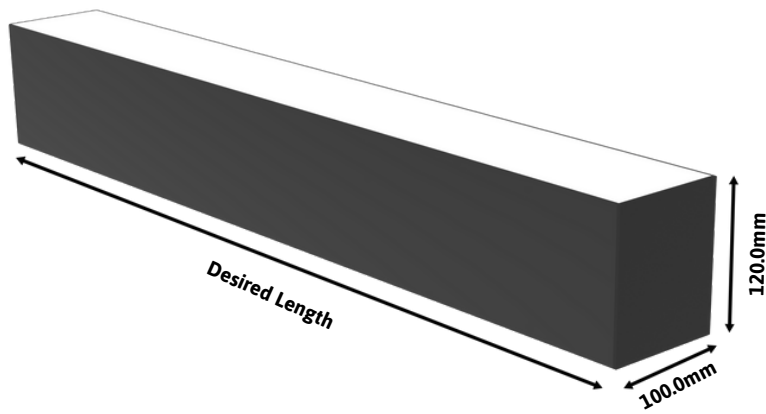

PRODUCT SHOWCASE



PRODUCT CODE

LIN100/SS/B/2000/3000LM/4000K/90/OP/20/DD

Linteq 100, suspended, black finish, 2000mm, 3000 lumens per metre, 4000K, CRI90, direct: opal diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK