




EDGE LIGHTING

LINTEQ 34


Our most compact performance Linqeq, the 34 provides maximum visual comfort with its optical louvred system for a high-performing working environment.

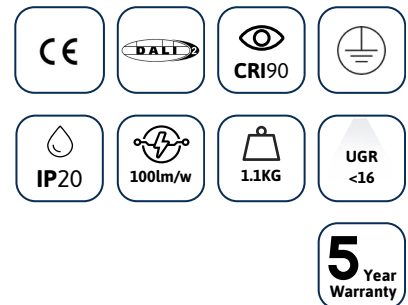

TECHNICAL INFORMATION

Installation	Suspended (SS)
Body Colour	Grey (G), White (W) or Black (B)
Dimensions	34mm x 75mm x desired length (mm)
Lumen Output (per metre)	1500lm (15W), 2000lm (20W), 3000lm (30W) or 4500lm (45W)
Colour Temperature	2700K, 3000K, 4000K, Tuneable White or RGBW
Colour Rendering Index	CRI90
Optical Distribution	Optical Louvre (OL)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

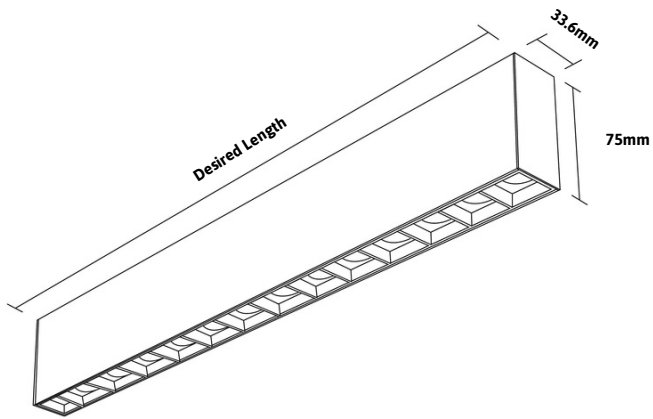

PRODUCT SHOWCASE



PRODUCT CODE

LIN34/SS/B/2000/3000LM/4000K/90/OL/20/DD

Linteq 34, suspended, black finish, 2000mm, 3000 lumens, 4000K, CRI90, optical louvre, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK