




# EDGE LIGHTING

## LINTEQ 50


Trimless sleek profile with screwless endcaps forms its timeless design, enhancing offices and energising retail. Fully customisable with various finishes, optics and acoustic wrapping.

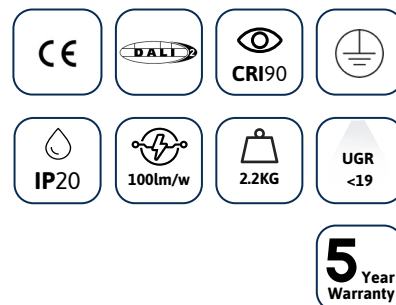


### TECHNICAL INFORMATION

Installation	Surface Mounted (SM) or Suspended (SS)
Body Colour	Grey (G), White (W) or Black (B)
Dimensions	50mm x 75mm x desired length (mm)
Lumen Output (per metre)	1500lm (15W), 2000lm (20W), 3000lm (30W) or 4500lm (45W)
Colour Temperature	2700K, 3000K, 4000K, Tuneable White or RGBW
Colour Rendering Index	CRI90
Optical Distribution	Direct: Opal Diffuser (OP) or Microprism Diffuser (MP) Direct/Indirect: Opal Diffuser (IDOP) or Microprism Diffuser (IDMP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

## DIMENSIONS

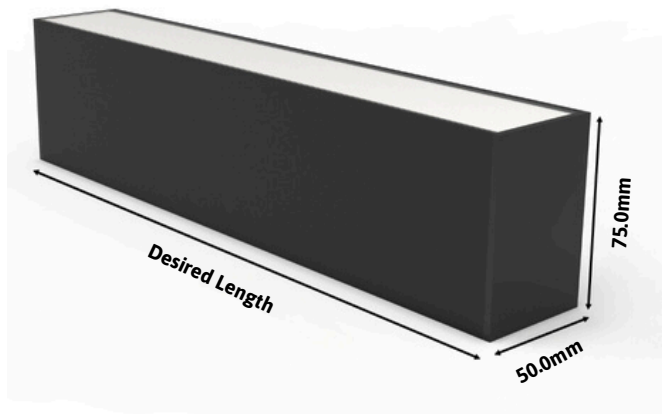

## PRODUCT SHOWCASE

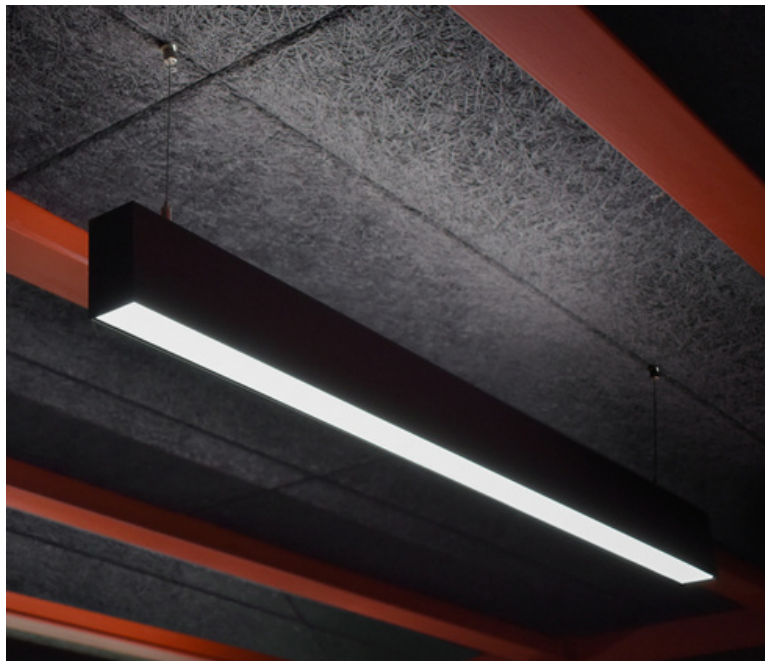

## PRODUCT CODE

**LIN50/SS/B/2000/3000LM/4000K/90/OP/20/DD**

Linteq 50, suspended, black finish, 2000mm, 3000 lumens per metre, 4000K, CRI90, direct: opal diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ [sales@edgelighting.co.uk](mailto:sales@edgelighting.co.uk)



**EDGE**  
LIGHTING

[EDGELIGHTING.CO.UK](http://EDGELIGHTING.CO.UK)