




EDGE
LIGHTING

ORBIT 1200


The Orbit is a performance feature pendant, as the ring sibling of our Linteq range. Available in various finishes, wraps and sizes, customisation is key to unlocking its potential.

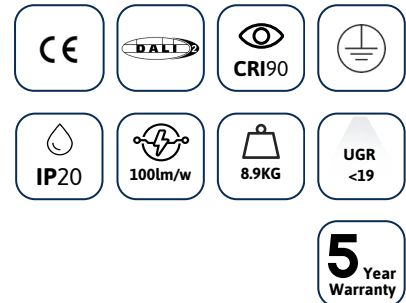

TECHNICAL INFORMATION

Installation	Surface Mounted (SM) or Suspended (SS)
Body Colour	Grey (G), White (W) or Black (B)
Dimensions	50mm x 70mm x Ø1200mm
Lumen Output	6000lm (60W) (Direct Opal) 9000lm (90W) (Direct/Indirect Opal)
Colour Temperature	3000K, 4000K, 5000K or Tuneable White
Colour Rendering Index	CRI90
Optical Distribution	Direct: Opal Diffuser (OP) Direct/Indirect: Opal Diffuser (IDOP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

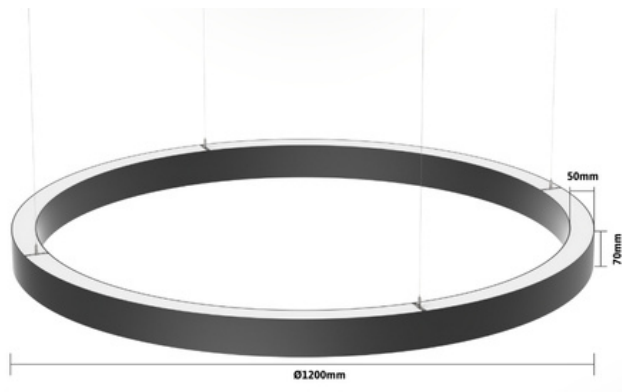

PRODUCT SHOWCASE



PRODUCT CODE

ORB1200/SS/B/6000LM/4000K/90/OP/20/DD

Orbit 1200, suspended, black finish, 6000 lumens per metre, 4000K, CRI90, direct: opal diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK