



SOLACE

Accessories

Our Solace features a wide, curved opal diffuser for wall mounting in circulation spaces. Available with occupancy & daylight sensing for energy saving replacements for fluorescent and fixed output legacy versions.




















TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	White (W)
Dimensions	Ø435mm x 100mm
Lumen Output	2600lm (25W)
Colour Temperature	4000K
Colour Rendering Index	CRI80
Optical Distribution	Opal Diffuser (OP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Microwave (MW), PIR Sensor (PIR) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)

DIMENSIONS

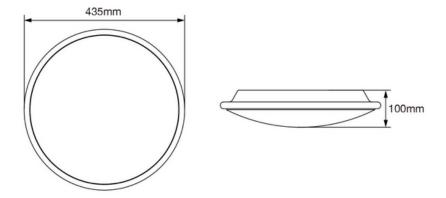

PRODUCT SHOWCASE



PRODUCT CODE

SLC/SM/W/2600LM/4000K/80/OP/20/DD

Solace, surface mounted, white finish, 3000 lumens, 4000K, CRI80, opal diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.







Contact us for more information