




EDGE LIGHTING

TRITON NODE


Sympathetic to wildlife and the environment with zero upward light and 3000K as standard, the Node is a compact wall mounted luminaire for area lighting with a range of lumen packages.

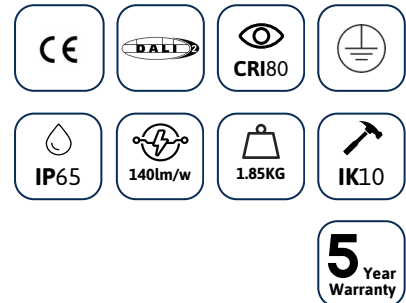

TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	Black (B)
Dimensions	235mm x 165mm x 108mm
Lumen Output	4200lm (30W) or 7000lm (50W)
Colour Temperature	3000K or 4000K
Colour Rendering Index	CRI80
Optical Distribution	Asymmetric Wide Forward Throw (AWF)
Ingress Protection	IP65
Controls	Fixed Output (FO), DALI (DD) or Photocell (PC)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

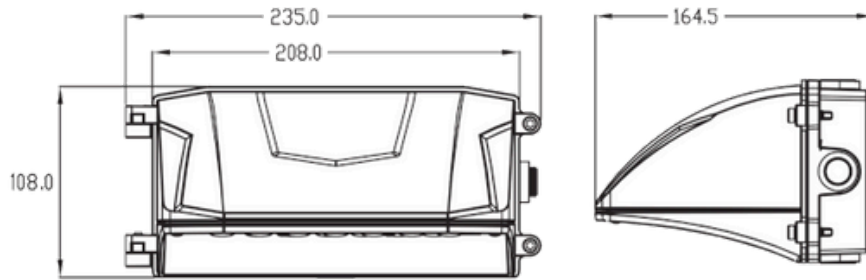

PRODUCT SHOWCASE



PRODUCT CODE

TRINODE/SM/B/4200LM/3000K/80/AWF/65/PC

Triton Node, surface mounted, black finish, 4200 lumens, 3000K, CRI80, Asymmetric Wide Forward Throw, IP65 rated, Photocell

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK