


EDGE
LIGHTING

CGPANEL 66


CGPanels are designed to integrate with a wide range of ceiling systems for toolless installation, such as clip-in, plank, and c-channel. All our panels are backlit as standard for premium efficiency and longevity.

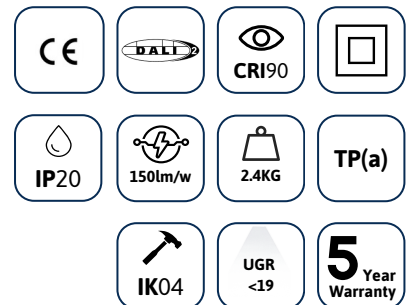


TECHNICAL INFORMATION

Installation	SAS120/SAS150 (S150)
Body Colour	White (W)
Dimensions	599mm x 599mm x 30mm
Lumen Output	3600lm (24W)
Colour Temperature	4000K
Colour Rendering Index	CRI90
Optical Distribution	Microprism Diffuser (MP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

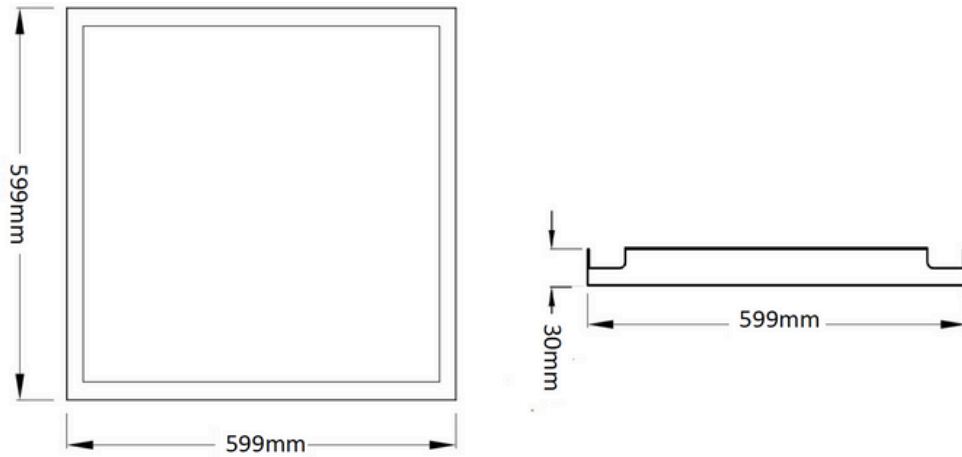

PRODUCT SHOWCASE

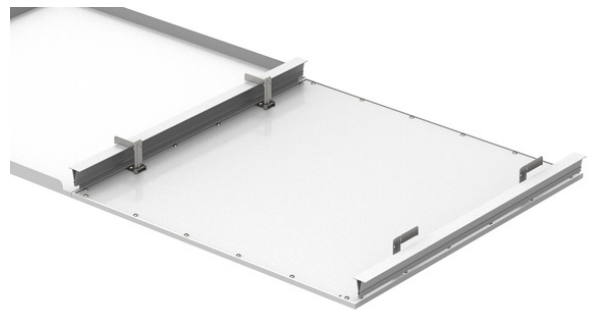

PRODUCT CODE

CGP66/R/W/3600LM/4000K/90/MP/20/DD

CGPanel 66, recessed, white finish, 3600 lumens, 4000K, CRI90, microprism diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK