




EDGE LIGHTING

CLIQ 1200


Clig is a versatile trunking system with choice of optics, expertly engineered to connect mechanically and electrically simultaneously, for unparalleled speed of installation. Customisable with linear, spotlight and sensor attachments.

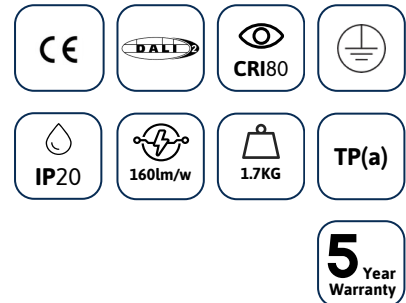

TECHNICAL INFORMATION

Installation	Suspended (SS)
Body Colour	White (W), Black (B) or Silver (S)
Dimensions	76mm x 70mm x 1200mm
Lumen Output	2880lm (18W), 3520lm (22W), 4160lm (26W) or 4800LM (30W)
Colour Temperature	2700K, 3000K, 4000K
Colour Rendering Index	CRI80
Optical Distribution	Wide Beam (WB), Flood (FL), Asymmetric Beam (AB) or Opal Diffuser (OP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Microwave (MW) or PIR Sensor (PIR)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

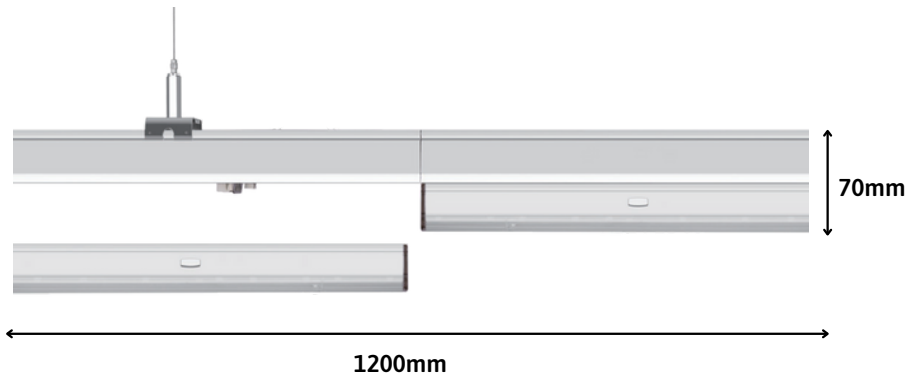

PRODUCT SHOWCASE



PRODUCT CODE

CLIQ1200/SS/W/2880LM/4000K/80/WB/20/DD

Cliq 1200m, suspended, white finish, 2880 lumens, 4000K, CRI80, wide beam, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK