ECLIPSE S400

Slim in profile with minimal trim, our Eclipse maximises lit surface area for a comfortable, low glare environment. S400 is wall or ceiling mounted for circulation and breakout spaces.

CE · DALI · CRI90 · IP20 · 88lm/w · 3.7KG · 5 Year Warranty

TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	Black (B)
Dimensions	Ø400mm x 86mm
Lumen Output	3500lm (40W) (Direct/Indirect Microprism)
Colour Temperature	3000K-4000K-5700K Switchable (CCT3457)
Colour Rendering Index	CRI90
Optical Distribution	Direct/Indirect: Microprism Diffuser (IDMP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Microwave (MW), Q-Sense (QS) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

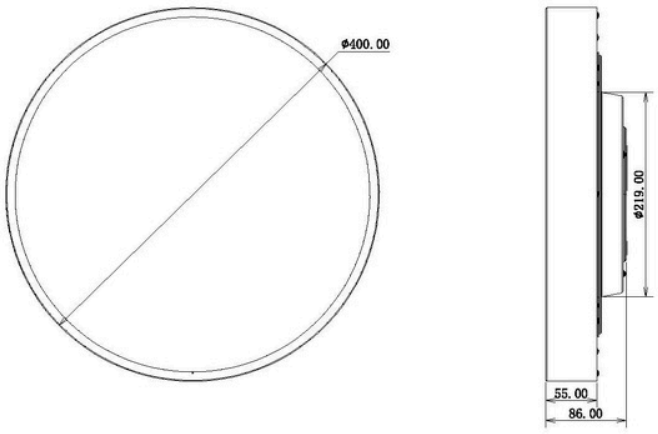

PRODUCT SHOWCASE

PRODUCT CODE

ECPS4/SM/B/3500LM/CCT3457/90/IDMP/20/DD

Eclipse S400, surface mounted, black finish, 3500 lumens, 3000K-4000K-5700K switchable , CRI90, direct/indirect: microprism diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.

Member of theLIA

Contact us for more information

020 8687 0190 sales@edgelighting.co.uk

EDGE LIGHTING
EDGELIGHTING.CO.UK