




EDGE LIGHTING

LEDTEQ 215


Ledteq is a commercial range of LED downlights for ambient lighting in plaster ceilings. The 215 is our largest housing, ideal for fluorescent replacement or greater output in high ceilings.

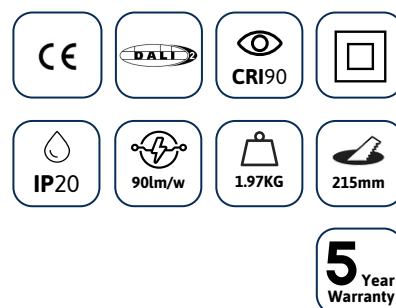


TECHNICAL INFORMATION

Installation	Recessed (R)
Body Colour	White (W)
Dimensions	Ø240mm x 140mm
Lumen Output	2000lm (23W), 3000lm (34W) or 4500lm (50W)
Colour Temperature	3000K or 4000K
Colour Rendering Index	CRI90
Optical Distribution	Medium Beam (MB) or Wide Beam (WB)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Master Connect (MC) or HubSense (HS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	White Reflector (WR), Black Reflector (BR), Satin Reflector (SR)

DIMENSIONS

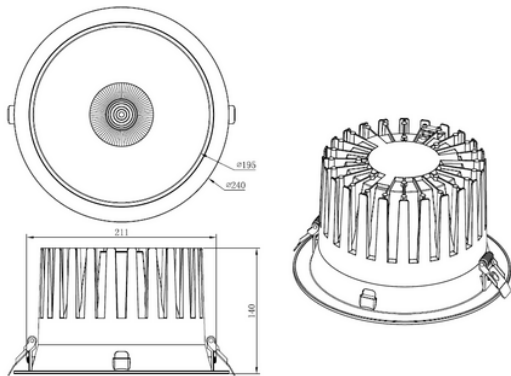

PRODUCT SHOWCASE

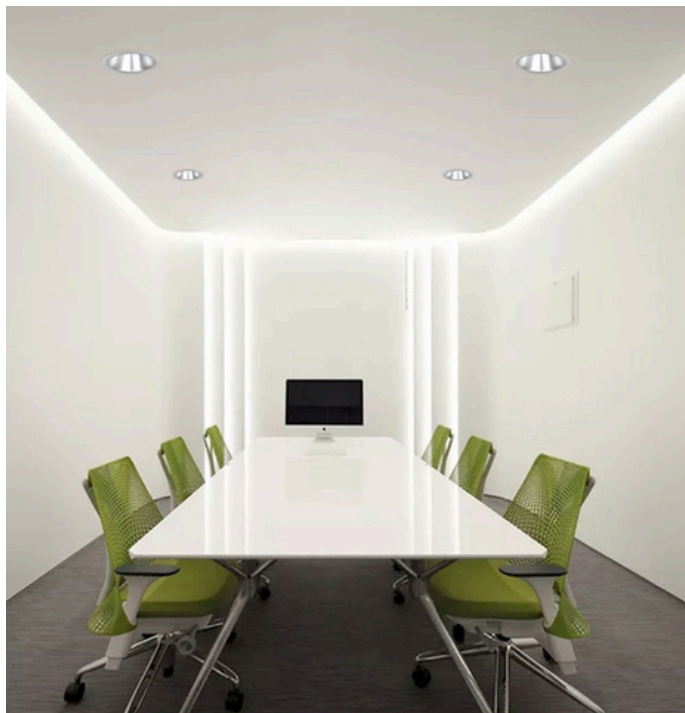

PRODUCT CODE

LED215/R/W/2000LM/4000K/90/MB/54/DD

Ledteq 215, recessed, white finish, 2000 lumens, 4000K, CRI90, medium beam, IP54 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK