


NOVA 1500

Sleek linear profile with screwless endcaps, lockable connectors and optional uplight forms Nova's modular design, supplied in fixed, ready-made lengths for offices and retail alike.

TECHNICAL INFORMATION

Installation	Surface Mounted (SM) or Suspended (SS)
Body Colour	Black (B)
Dimensions	50mm x 75mm x 1500mm
Lumen Output (per metre)	5100lm (45W)
Colour Temperature	4000K
Colour Rendering Index	CRI90
Optical Distribution	Microprism Diffuser (MP)
Ingress Protection	IP20
Controls	DALI 2 (D2)
Emergency	3 Hour DALI 2 Emergency (ED2), 3 Hour Auto Test Emergency (AT)
Accessories	-

DIMENSIONS

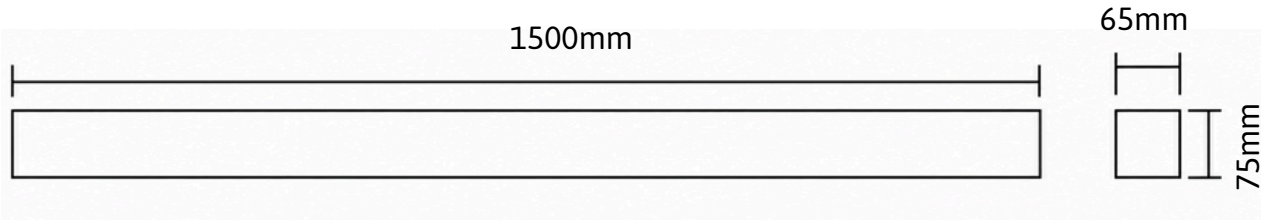

PRODUCT SHOWCASE



PRODUCT CODE

NOVA1500/SS/B/1500/5100LM/4000K/90/MP/20/D2

NOVA 1500, suspended, black finish, 1500mm, 5100 lumens per metre, 4000K, CRI90, Microprism Diffuser, IP20 rated, DALI 2 dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.

Member of theLIA

Contact us for more information

020 8687 0190 sales@edgelighting.co.uk

EDGE LIGHTING
EDGELIGHTING.CO.UK