




EDGE
LIGHTING

VEGA PROTEQ


Built for resilience, the Proteq is a recessed downlight with IK10 impact resistance and IP65 protection. Its high-efficiency COB light source ensures reliable performance in corridors and high-traffic areas.

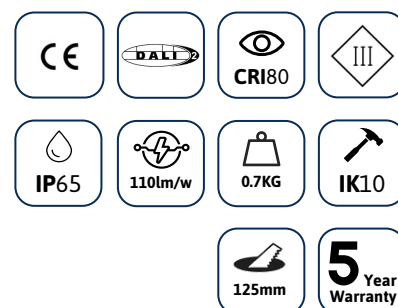

TECHNICAL INFORMATION

Installation	Recessed (R)
Body Colour	White RAL9016 (W)
Dimensions	Ø150mm x 64mm
Lumen Output	1950lm (18W) or 2750lm (25W)
Colour Temperature	3000K or 4000K
Colour Rendering Index	CRI80
Optical Distribution	Medium Beam 36° (MB)
Materials Used	Die-cast Aluminium Housing + Tempered glass lens
Controls	Fixed Output (FO), DALI (DD), Master Connect (MC) or HubSense (HS)
Emergency	3 Hour Emergency (EM3), DALI Emergency (EMD)
Accessories	

DIMENSIONS

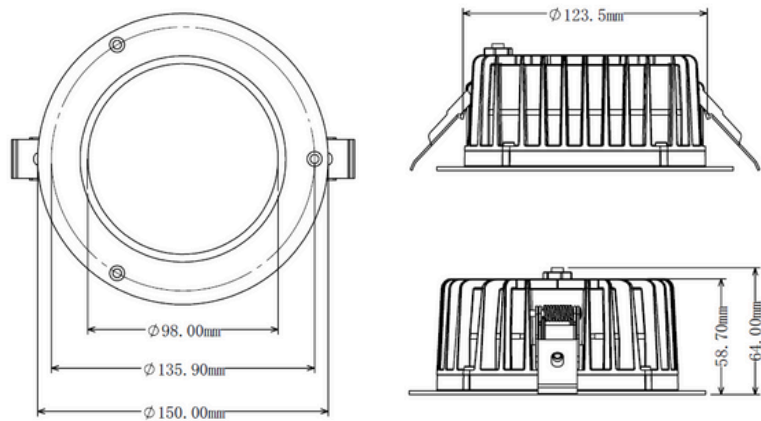

PRODUCT SHOWCASE



PRODUCT CODE

VEGAPRO/R/W/1950LM/3000K/80/MB/65/DD/EM3

Vega Proteq, recessed, white finish, 1950 lumens, 3000K, CRI80, medium beam 36°, IP65 rated, DALI Dimming, 3 hour emergency

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK