


EDGE
LIGHTING

STRIDE


In landscaping designs for illuminating steps, pathways and community spaces, Stride is designed to subtly light ahead without any upward and minimal horizontal light, for optimal comfort and performance.

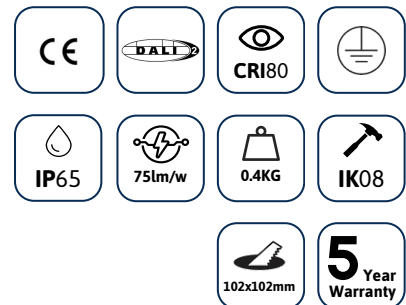

TECHNICAL INFORMATION

Installation	Recessed (R)
Body Colour	Black (B)
Dimensions	110mm x 110mm x 105mm
Lumen Output	300lm (4W)
Colour Temperature	3000K or 4000K
Colour Rendering Index	CRI80
Optical Distribution	Asymmetric Forward (AF)
Ingress Protection	IP65
Controls	Fixed Output (FO) or DALI (DD)
Emergency	-
Accessories	-

DIMENSIONS

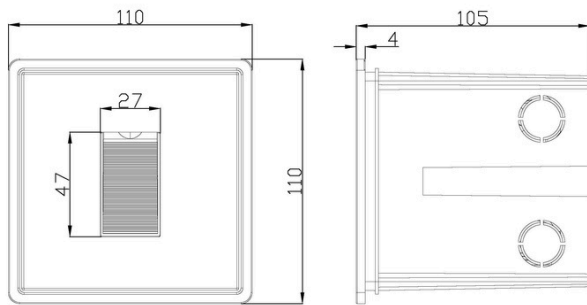

Cut-out



102mm x 102mm x 101mm

PRODUCT SHOWCASE



PRODUCT CODE

STRIDE/R/B/300LM/4000K/80/AF/65/DD

Stride, recessed, black finish , 300 lumens, 4000K, CRI80, asymmetric forward, IP65 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK