



TWILIGHT 610






















TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	Grey (G), White (W) or Black (B)
Dimensions	42mm x 90mm x 610mm
Lumen Output	810lm (7W), 1620lm (14W) or 2700lm (24W) (Direct) 1620lm (14W), 3240lm (28W) or 5400lm (48W) (Direct/Indirect)
Colour Temperature	2700K, 3000K, 4000K, Tuneable White or RGBW
Colour Rendering Index	CRI90
Optical Distribution	Opal Diffuser (OP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Q-Sense (QS) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)

Accessories

_

DIMENSIONS

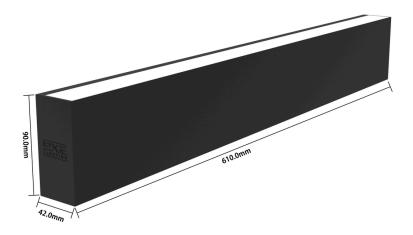

PRODUCT SHOWCASE



PRODUCT CODE

TWL610/SM/B/2700LM/4000K/90/OP/20/DD

Twilight 610, surface mounted, black finish, 2700 lumens, 4000K, CRI90, opal diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



