




EDGE LIGHTING

TWILIGHT


Twilight's slender profile with hidden wall hanging fixings embraces minimalist design. Illuminating vertically, it is commonly used for large, open plan spaces and mid size rooms, providing walkway luminance and wall washing.

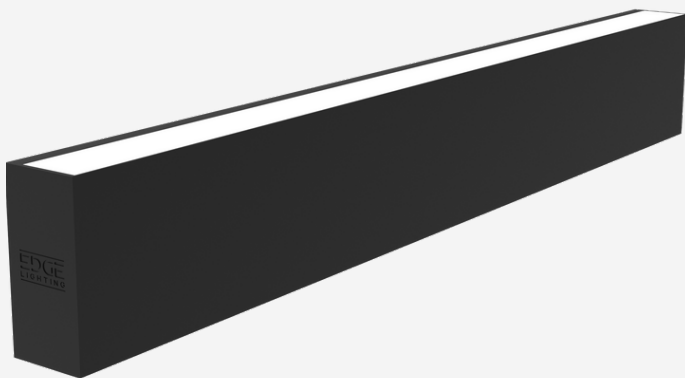

TECHNICAL INFORMATION

Installation	Surface Mounted (SM)
Body Colour	Grey (G), White (W) or Black (B)
Dimensions	42mm x 90mm x desired length (per metre)
Lumen Output	1500lm (15W), 2000lm (20W), 3000lm (30W) or 4500lm (45W)
Colour Temperature	2700K, 3000K, 4000K, Tuneable White or RGBW
Colour Rendering Index	CRI90
Optical Distribution	Direct: Opal Diffuser (OP) Direct/Indirect: Opal Diffuser (IDOP)
Ingress Protection	IP20
Controls	Fixed Output (FO), DALI (DD), Master Connect (MC) or HubSense (HS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	-

DIMENSIONS

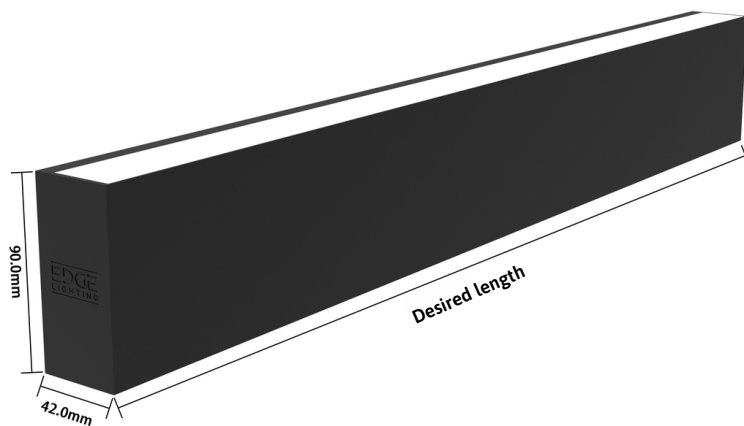

PRODUCT SHOWCASE



PRODUCT CODE

TWL/SM/B/2000LM/4000K/90/OP/20/DD

Twilight, surface mounted, black finish, 2000 lumens, 4000K, CRI90, opal diffuser, IP20 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.



Contact us for more information

☎ 020 8687 0190

✉ sales@edgelighting.co.uk



EDGE
LIGHTING

EDGELIGHTING.CO.UK