



VERTEX SOLAR



IP65

A modern take on a traditional sodium highbay for ambient warehouse lighting, the Solar is reliable for fit and forget with single point installation. Die-cast for industry grade protection to IP65 and IK10 with a range of sensors available.






TECHNICAL INFORMATION

Installation	Suspended (SS) or Surface Mounted (SM)
Body Colour	Black (B)
Dimensions	Ø265mm x 158mm
Lumen Output	8400lm (60W)
Colour Temperature	3000K, 4000K or 5000K
Colour Rendering Index	CRI80
Optical Distribution	Wide Beam (WB) or Flood (FL)
Ingress Protection	IP65
Controls	Fixed Output (FO), DALI (DD), Microwave & Daylight Sensor (MWD) or Casambi (CS)
Emergency	3 Hour Emergency (EM3) or DALI Emergency (EMD)
Accessories	Polycarbonate Reflector 60° (PC6), Aluminium Reflector 100° (AL10)

DIMENSIONS

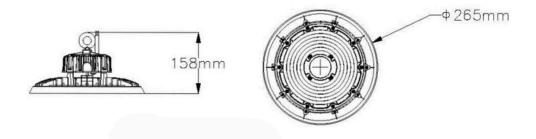

PRODUCT SHOWCASE



PRODUCT CODE

VTX/SLR/SS/B/8400LM/4000K/80/WB/65/DD

Vertex Solar, suspended, black finish, 8400 lumens, 4000K, CRI80, wide beam, IP65 rated, DALI dimming

SPECIFICATIONS MAY BE ALTERED WITHOUT ADVANCE NOTICE.





